

Standard Sizes:

12x12	18x24	18x30
12x18	18x18	
12x30	24x24	

stonecreekpavers are sold by the "random pattern" (the mix of all seven sizes) OR "by the size". The random pattern repeats every 18 sq. ft. All standard sizes are undersized 1/2" to accommodate a 1/2" grout joint. See pattern and size guides.

Standard thickness are 1" or 1 3/4" in all standard colors and sizes.

Custom Sizes and Thickness; Transition strips, copings, radiuses, serpentines, and bullnoses are available in any thickness. Drawings or templates required. Form charges will apply.

Standard Coping: 12",14",16",18", & 20" widths
(47 1/2" long - 2 1/2" thick)

Custom Sizes and Thickness; serpentine / radius copings, corner transitions and bullnoses are available in any thickness. Drawings or templates required. Form charges will apply.

Colors:

We offer 7 standard colors: Rice White, Dolphin Gray, Silver Smoke, Champagne, Buff, Palomino and Tennessee Limestone.

Color and texture variations occur as in natural stone.

That's the beauty of **stonecreekpavers**!!

Product Testing:

Compressive Strength (PSI) = 6520 avg.

Static of coefficient friction = 0.80 avg.

Handcrafting:

Every **stonecreekpaver** is individually hand poured.

All forms are fabricated on site to our standard or your individual specifications, assuring that each tile is square and dimensionally correct. The consistency of size and shape in the tiles makes installation much easier and faster than that of most natural stones.

The tiles are air "cured" over a period of weeks. During this time each tile develops and shows its own individual variations in color and texture!

Orders are loaded by hand on special crates also fabricated at our facility. The loaded crates are wrapped and banded using a technique which prevents unnecessary breakage in shipping.

Installation:

stonecreekpavers are easily installed using the same guidelines as for ceramic tile and stone installation. For best results use a qualified tile contractor. Installers are amazed at how rapidly our product is installed.

Sealers:


Sealing is **highly recommended** at installation and should be maintained with a high grade sealer to preserve the integrity and continuity of our product. **stonecreekpavers** has been very pleased with the performance of PROSOCO sealers. (i.e. SLX 100) See your local PROSOCO dealer for further information and to consider the options for each particular installation.

Cleaning:

Clean only with scrub brush and light non acidic detergent/soap. All other procedures can pit, streak, or modify the finished surface of the product.

stonecreekpavers

RANDOM PATTERN

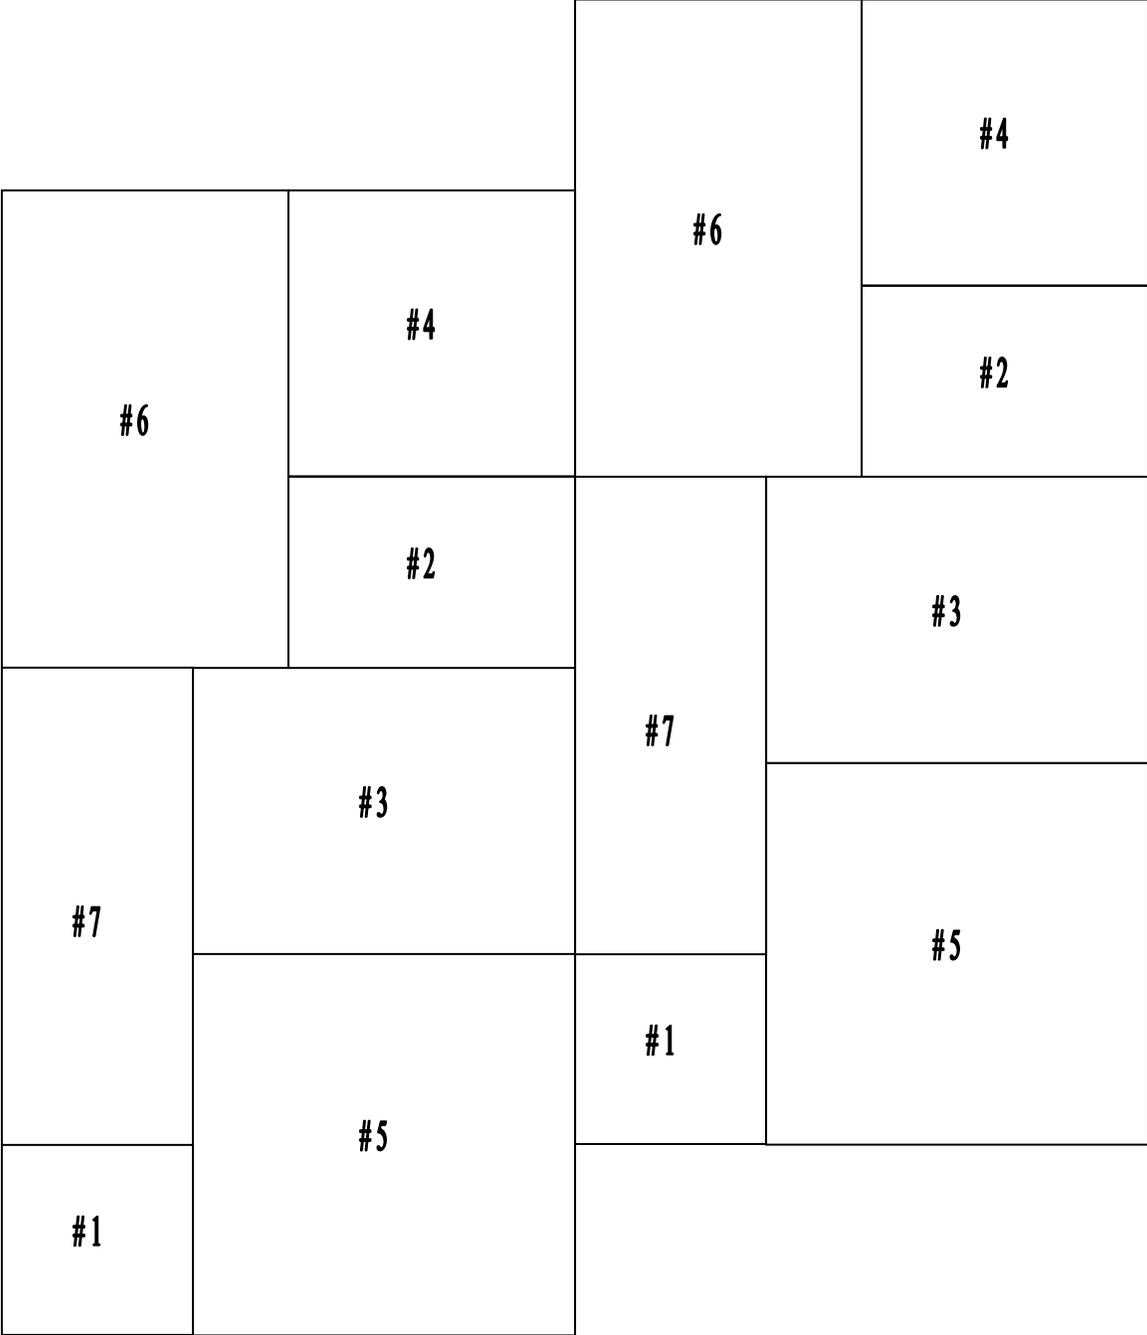

stonecreekpavers

- Architectural pavers are manufactured in seven (7) standard sizes with trim pieces available.

- 2 standard thicknesses
1 $\frac{3}{4}$ " thick (approx. weight 20 lbs / sq. ft.)
1" thick (approx. weight 12 lbs. / sq. ft.)

-All sizes are undersized to allow for $\frac{1}{2}$ " grout joint.

